

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




RECEIVED
PCT
1999
JUN 26
1999

(43) International Publication Date
4 January 2001 (04.01.2001)

PCT

(10) International Publication Number
WO 01/01536 A1

- (51) International Patent Classification⁷: H02H 3/00, (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/US00/17521
- (22) International Filing Date: 26 June 2000 (26.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/344,545 25 June 1999 (25.06.1999) US
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: GENERAL ELECTRIC COMPANY
[US/US]; 1 River Road, Schenectady, NY 12345 (US).
- Published:
— With international search report.
- (72) Inventors: MASON, Henry, H.; 1091 New Britain Avenue, Farmington, CT 06032 (US). SEYMOUR, Raymond, Kelsey; 38 Provencher Drive, Plainville, CT 06062 (US).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.
- (74) Agent: COLBURN, Philmore, H., II; Cantor Colburn LLP, 55 Griffin Road South, Bloomfield, CT 06002 (US).
- (54) Title: ARC FAULT CIRCUIT BREAKER

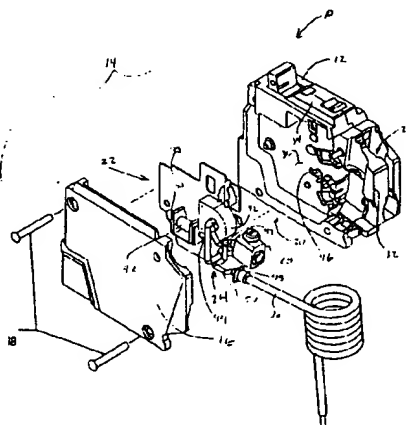

(57) Abstract: An arc fault circuit breaker (10) comprising an electronics portion (22) that is interconnected with a mechanical portion (12) is presented. A plunger arm (50) affixed to the end of a plunger shaft (42) of a solenoid (40) connects the electronics portion (22) with the mechanical portion (12). A protrusion (64) is provided to assist in assembly of the circuit breaker (10). The protrusion (64) depends from the plunger arm (34). An assembler applies a light downward force with one finger (60) on the protrusion (64) and the plunger arm (34) tends to assume a position at right angles to the surface of the printed circuit board (38). When the electronics portion (22) is connected with the mechanical portion (12), the plunger arm (34) is properly aligned and it enters into the slot (46). If the electronics portion (22) is slightly offset, the finger (60) on the protrusion (64) can move the plunger arm (34) slightly to align the plunger arm (34). Thus, the invention enables an assembler to hold and guide the plunger arm (34) into the correct position with one hand while assembling the circuit breaker (10).

WO 01/01536 A1

ARC FAULT CIRCUIT BREAKER

BACKGROUND OF THE INVENTION

The present invention relates generally to a circuit breaker.

- 5 More specifically the present invention relates to an arc fault circuit breaker.

Arc fault circuit breakers are well known. These breakers comprise contacts that open upon sensing arcing from line to ground, and/or from line to neutral. Arc fault circuit breakers typically use a differential transformer to measure arcing from line to ground. Detecting arcing from line to neutral is accomplished by detecting rapid changes in load current by measuring voltage drop across a relatively constant resistance, usually a bi-metal resistor.

15

Components of arc fault circuit breakers are generally assembled into separate compartments as defined by their function. More specifically, mechanical components, e.g., load current carrying and switching components, of each pole are assembled into mechanical compartments, while the current sensing components are

20

-2-

assembled into an electronics compartment. In order to connect the compartments, the load current of each pole must be routed from the mechanical compartments into the electronics compartment, through appropriate current sensing devices, and back into the mechanical

5 compartments. Additionally sensing lines, e.g., from the bi-metal resistors, must also be routed from the mechanical compartments into the electronics compartment. Because these circuit breakers sense arc faults, which are essentially short circuits, the connections of the load current carrying components throughout the circuit breaker must be capable of

10 withstanding enormously high surge currents, sometimes in excess of 10,000 amps. The stresses caused by these extremely large surge currents can blow a connection apart that is not manufactured to proper quality standards. This means that during the assemble process, high quality connections, e.g., welds, bolts, or crimps, must be carefully made and

15 inspected in order to survive the extremely high surge currents, and must be completed at a rate that meets the production schedule.

The electronics compartment typically includes a solenoid having a plunger shaft with a right-angle plunger arm attached at one end

20 thereof. During assembly of the circuit breaker, the plunger arm must drop into a slot in the mechanical compartment for activating a trip mechanism during operation. It will be appreciated that since the plunger shaft is cylindrical, both the plunger shaft and the plunger arm attached to it easily rotate. When the electronics compartment is mated with the

25 mechanical compartment, the plunger arm has been known to rotate in such a manner that it wedges between the two compartments.

-3-

BRIEF SUMMARY OF THE INVENTION

In an exemplary embodiment of the invention, an arc fault
5 circuit breaker comprises an electronics compartment having current
sensing components and a mechanical compartment having load current
carrying and switching components. Interconnection between these
components is in part provided by a plunger arm, which is attached to one
end of a plunger shaft. The plunger shaft extends from a solenoid in the
10 electronics compartment. A protrusion is provided at the top side of the
plunger arm, opposite a long end of the arm. This protrusion is used as a
guide by an assembler, who may place one finger on the protrusion while
holding an electronics compartment during assembly of the circuit
breaker. As the assembler applies a light downward force on the plunger
15 arm, the arm tends to assume a position at a right angle to the
surface of a printed circuit board in the electronics compartment. When
the electronics compartment is mated with the mechanical compartment
the plunger arm is thereby properly aligned and it drops into a slot within
the mechanical compartment. Thus, the invention enables an assembler to
20 hold and guide the plunger arm during assembly of the circuit breaker.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Referring now to the drawings wherein like elements are
numbered alike in the several Figures:

Figure 1 is a side elevational view of an arc fault circuit
interruption circuit breaker in accordance with the present invention;

30

-4-

Figure 2 is a perspective partially exploded view of the circuit breaker of Figure 1;

Figure 3 is a side elevation view of the circuit breaker of Figure 1 with the cover removed, thereby exposing to view the electronics compartment;

Figure 4 is a perspective view of a plunger arm in accordance with the prior art;

Figure 5 is a perspective view of the plunger arm in the circuit breaker of Figure 1; and

Figure 6 is a perspective view of the solenoid and plunger arm in the circuit breaker of Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Figures 1 and 2, an arc fault circuit breaker in accordance with the present invention is shown generally at 10. Circuit breaker 10 comprises a first housing 12, a second housing 14, and a cover 16 that are assembled securely together with a plurality of rivets or other tamper resistant fasteners 18. First housing 12 defines a mechanical compartment, having load current carrying and switching components disposed therein (collectively referred to herein as a mechanical sub-assembly), as is well known. Second housing 14 defines an electronics compartment 20, having current sensing components 22 and neutral current carrying components 24 disposed therein (collectively, the current sensing components 22 and the neutral current carrying

-5-

components 24 are referred to herein as an electronics sub-assembly 25). A load current from a source (not shown) is connected to a line connection and conducted through current carrying and switching components in the mechanical compartment to a load lug 26 for customer connection to a load (not shown). A neutral current from the load connects to neutral lug 28, and conducts along the neutral current carrying components 24 to neutral return wire 30 for customer connection to the source. Arc faults are sensed and processed by sensing components 22.

10 The mechanical compartment is the same as in the prior art with reference being by to U.S. Patent No. 5,818,671 (which is incorporated by reference) for a detailed description thereof.

15 The electronics compartment 20 is defined by the second housing 14. The second housing 14 is generally rectangular in shape and comprised of electrical insulative material, i.e., plastic. Second housing 14 includes an insulative tab 32, a rim 34, and side wall 36. Tab 32 protrudes forwardly from the front of second housing 14 adjacent neutral lug 26 to provide an insulative barrier. Rim 34 extends around the periphery of side wall 36.

25 Referring to Figure 4, a plunger arm in accordance with the prior art is generally shown at 50. Plunger arm 50 comprises a mounting portion 52 and an arm portion 54. A mounting hole 56 is provided in portion 52 for receiving a plunger shaft.

30 Referring to Figures 5 and 6, the plunger arm 34 of the present invention comprises a mounting portion 58 and an arm portion 60, as in the prior art. As is known, it is arm portion 60 that extends through slot 46 to interact with the mechanical compartment. A

-6-

mounting hole 62 is provided in portion 58 for receiving plunger shaft 42, again as in the prior art. In accordance with an exemplary embodiment of the present invention, a protrusion 64 depends from portion 58 in a direction generally opposite that of arm portion 60. It will be appreciated
5 that plunger arm 34 with protrusion 64 is preferably an integrally molded plastic member.

This protrusion 64 is used as a guide by an assembler, who may place one finger on protrusion 64 while holding the electronics sub-assembly 25. As the assembler applies a light downward force on the
10 plunger arm 34, the plunger arm 34 tends to assume a position at right angles to the surface of the printed circuit board 38 (Figure 2). When the electronics sub-assembly 25 is mated with the mechanical sub-assembly, the plunger arm 34 is properly aligned and it drops into the slot 46. If the
15 electronics sub-assembly 25 is slightly offset, the assembler's finger on the protrusion can move the plunger arm 34 slightly to align the plunger arm for insertion in slot 46. Thus, the present invention enables an assembler to hold and guide the plunger arm 34 into the correct position with one hand while assembling the circuit breaker 10.

20

Current sensing components 22 include a circuit board 38 which is electrically connected to a solenoid 40 and a current sensing transformer 42. Upon receiving signals indicative of an arc fault, circuit board 38 provides a trip signal to trip the arc fault circuit breaker 10.

25

Also referring to Figure 3, solenoid 40 has a plunger shaft 42 with a right angle plunger arm 44 (Figure 6) depending therefrom. As is known, plunger arm 34 provides the means to trip the circuit breaker 10 under arc fault conditions. The plunger arm 34 extends into the
30 mechanical compartment through a slot 46 inside wall 36.

-7-

That is when an arc fault is sensed, circuit board 38 generates a trip signal to actuate solenoid 40, which (via plunger shaft 42) causes the plunger arm 34 to act which in turn acts on contacts in the mechanical compartment to open the load current path.

5 The neutral current carrying components 24 within the electronics compartment 20 are electrically connected, e.g., welded, bolted, or crimped, to form a neutral current path for the neutral current. The neutral current path begins at neutral lug 28 where the neutral current enters the electronics compartment 20. Neutral lug 28 secures the neutral
10 lead connected to the load against neutral terminal which is connected to a conductor 47 to provide electrical continuity thereto. The neutral terminal is electrically connected to neutral return wire 30 via a connection 48 and conductor 50.

15 Both conductors 50 and 47 (the neutral current path and the load current path, respectively) are routed through the current sensing transformer 42 to sense arcing from line to ground as is well known. This is accomplished by routing the flow of the neutral current through the sensing transformer 42 in the opposite direction to the flow of the load
20 current. The total current flow through sensing transformer 42 thus cancels unless an external ground fault current is caused by arcing from line to ground. The resulting differential signal, sensed by sensing transformer 42, is indicative of the ground fault current and is processed by circuit board 38, in a known manner.

25 While the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In
30 addition, many modifications may be made to adapt a

-8-

particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the

5 invention will include all embodiments falling within the scope of the appended claims.

-9-

What is claimed is:

1. A circuit breaker comprising:
a first housing having mechanical components of said
circuit breaker disposed therein; and
a second housing having electronic components of said
5 circuit breaker disposed therein, said second housing attaching with said
first housing to allow said electronic and mechanical components to
interact, said electronic components including,
a solenoid and,
an arm driven by said solenoid, said arm having a
10 protrusion extending there
from for guiding said arm when attaching said first and
second housings.
2. The circuit breaker of claim 1 further comprising:
a shaft extending from and driven by said solenoid, said
arm being disposed on said shaft for being driven.
3. The circuit breaker of claim 1 wherein said arm and
said protrusion comprise an integrally molded plastic member.
4. The circuit breaker of claim 1 wherein said arm
includes an arm portion extending in one direction with said protrusion
extending generally in an opposite direction.
5. The circuit breaker of claim 1 is an arc fault circuit
breaker.

-10-

6. A circuit breaker having electronic and mechanical components which interact through the action of an arm driven by a solenoid, wherein the improvement comprises:

5 a protrusion extending from said arm for guiding said arm during assembly of said circuit breaker.

7. The circuit breaker of claim 6 further comprising:

a shaft extending from and driven by said solenoid, said arm being disposed on said shaft for being driven.

8. The circuit breaker of claim 6 wherein said arm and said protrusion comprise an integrally molded plastic member.

9. The circuit breaker of claim 6 wherein said arm includes an arm portion extending in one direction with said protrusion extending generally in an opposite direction.

10. The circuit breaker of claim 6 is an arc fault circuit breaker.

11. A method of assembling a circuit breaker comprising:
interconnecting a mechanical component portion of said circuit breaker and an electronic component portion of said circuit breaker; and

5 applying a force on a protrusion of an arm to guide said arm while interconnecting said mechanical component portion and electronic component portion.

-11-

12. The method of claim 11 wherein said step of applying comprises applying said force on said protusion to guide said arm into a slot.

13. The method of claim 11 wherein said arm includes an arm portion extending in one direction with said protrusion extending generally in an opposite direction.

14. The method of claim 11 wherein said circuit breaker is an arc fault circuit breaker.

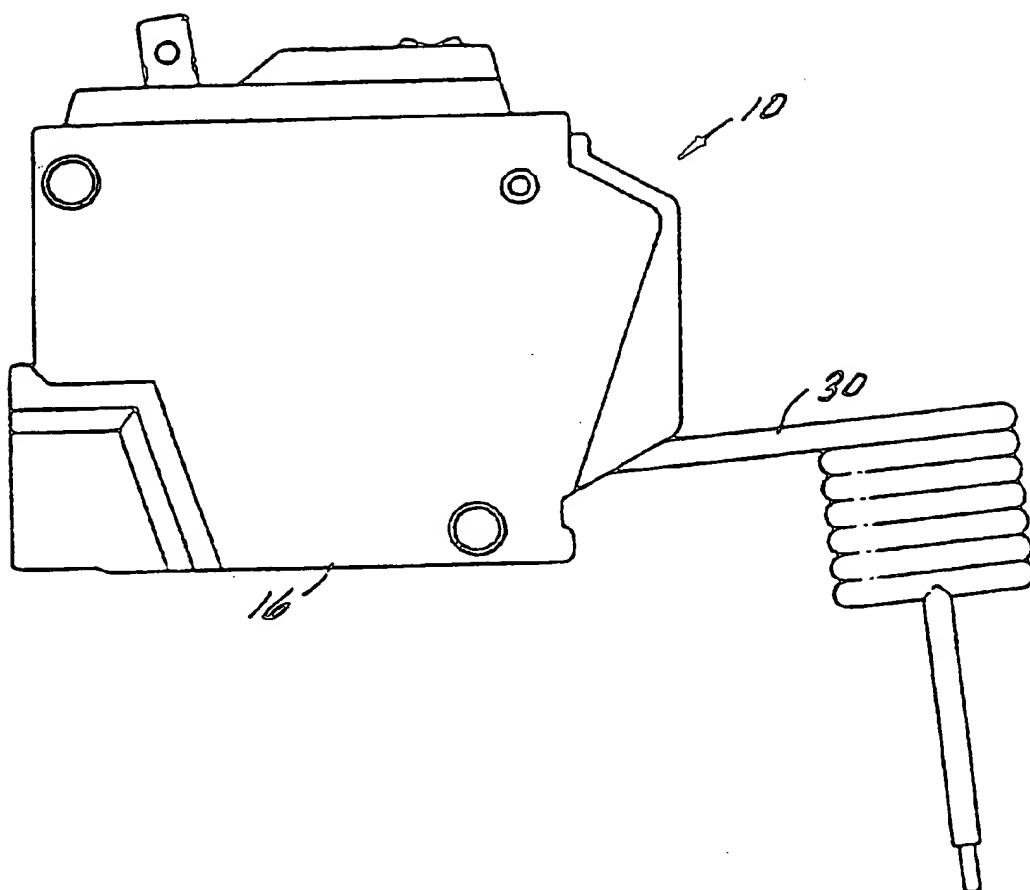


FIG. 1

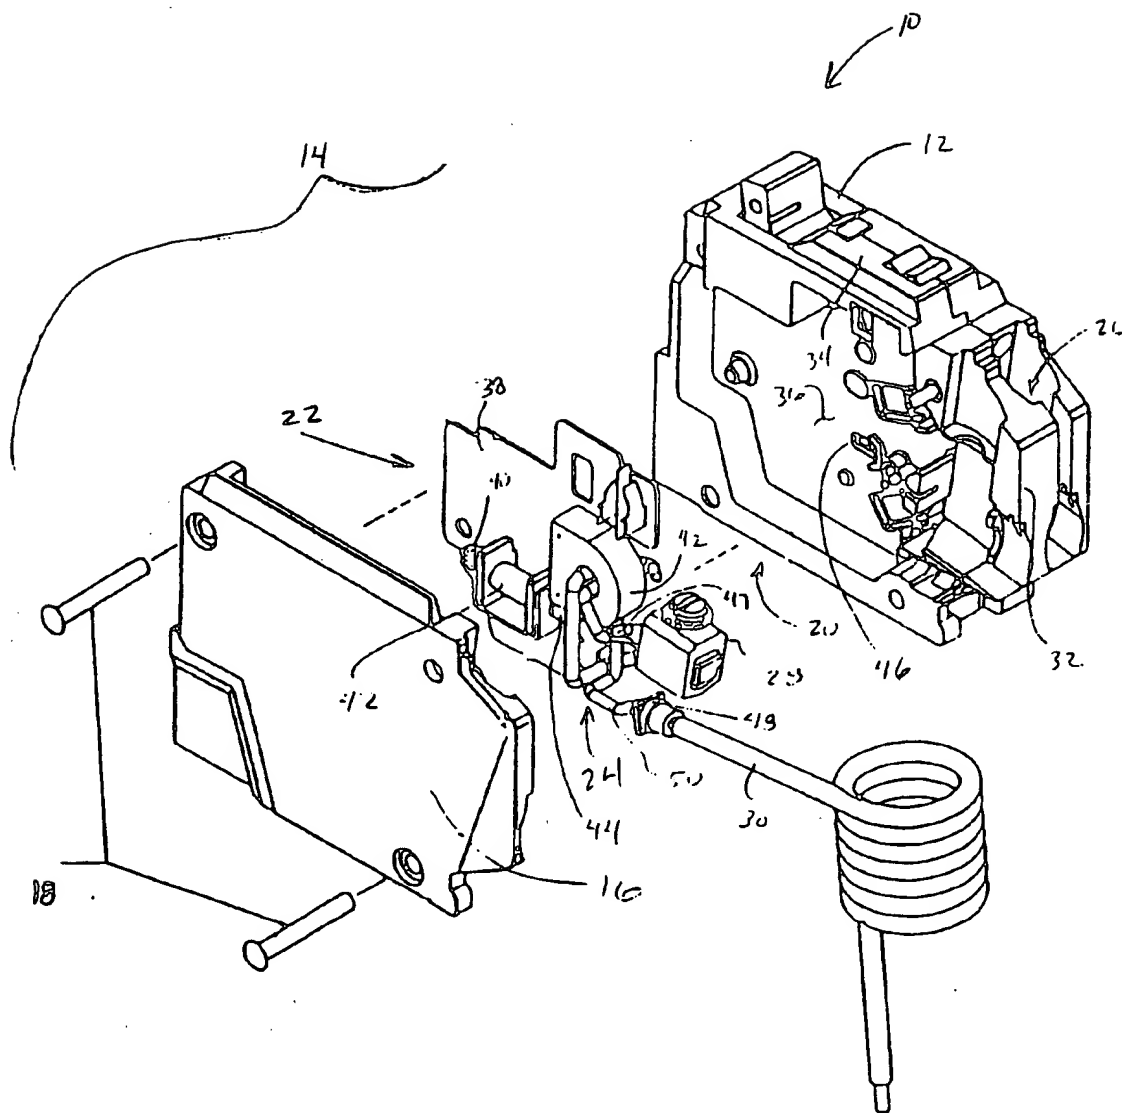


FIG. 2

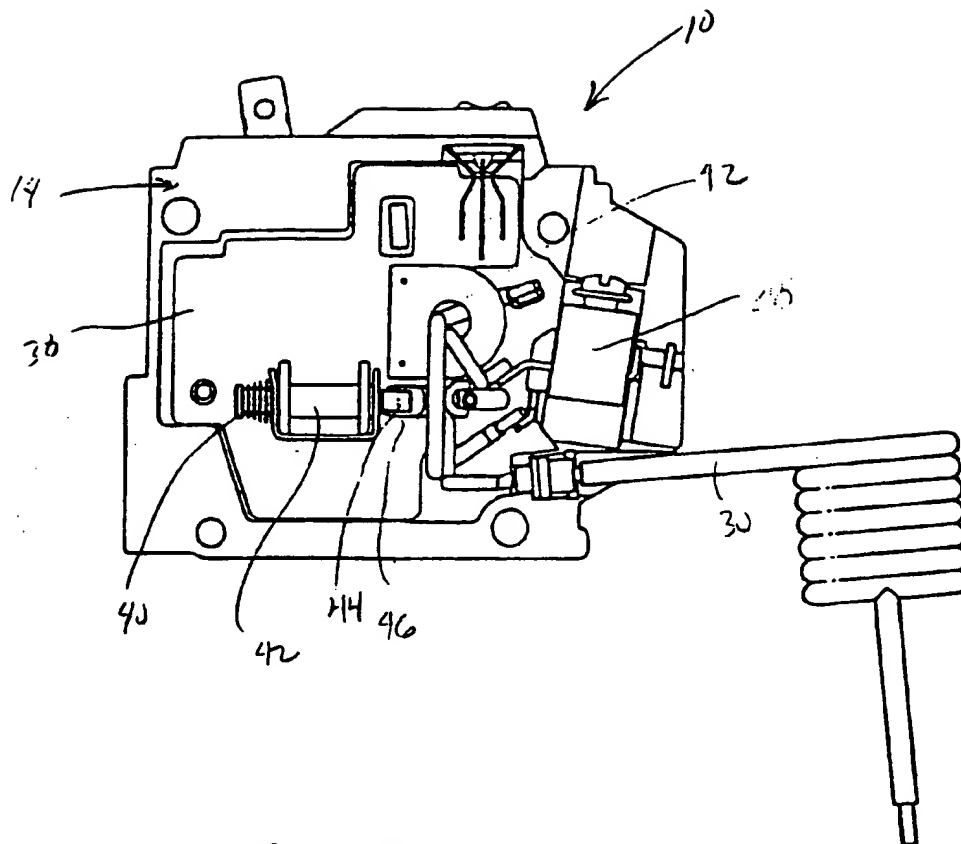


FIG. 3

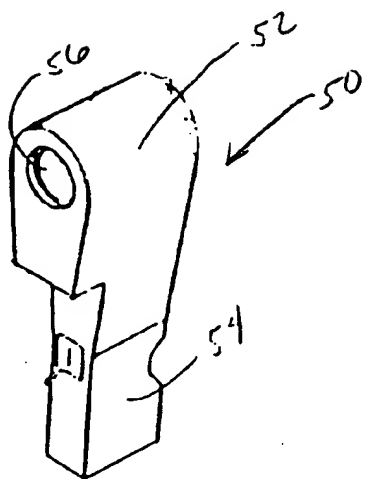


FIG. 4
(PERSPECTIVE VIEW)

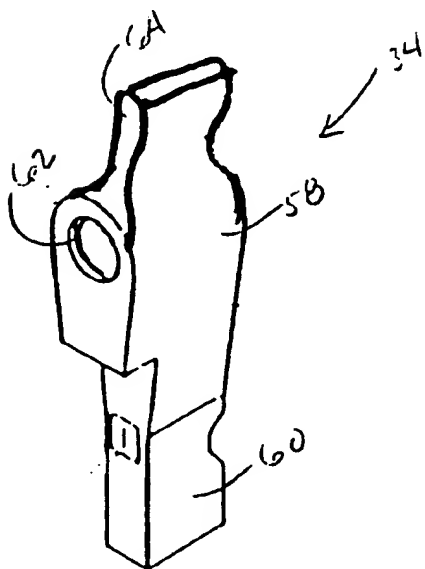


FIG. 5

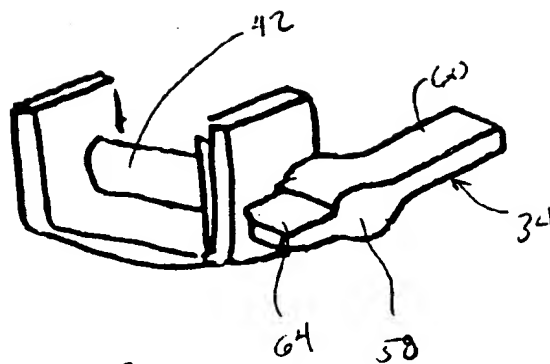


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/17521

| | | |
|--|--|-----------------------|
| A. CLASSIFICATION OF SUBJECT MATTER IPC(7) : H02H 3/00, 3/16; H01H 73/00 US CL : 335/18, 202; 361/42-51 According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 335/18, 202; 361/42-51 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| Y,P | US 5,982,593 A (KIMBLIN et al.) 09 November 1999 (09.11.1999), see entire document. | 1-14 |
| Y | US 5,483,211 A (CARRODUS et al.) 09 January 1996 (09.01.1996), see entire document. | 1-14 |
| Y | US 5,446,431 A (LEACH et al.) 29 August 1995 (29.08.1995), see entire document. | 1-14 |
| Y | US 4,686,600 A (MORRIS et al.) 11 August 1987 (11.08.1987), see entire document. | 1-14 |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex. | | |
| * Special categories of cited documents: | | |
| "A" document defining the general state of the art which is not considered to be of particular relevance | "T" later documents published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention | |
| "E" earlier application or patent published on or after the international filing date | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone | |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art | |
| "O" document referring to an oral disclosure, use, exhibition or other means | "&" documents member of the same patent family | |
| "P" document published prior to the international filing date but later than the priority date claimed | | |
| Date of the actual completion of the international search 04 August 2000 (04.08.2000) | Date of mailing of the international search report 17 AUG 2000 | |
| Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230 | Authorized officer Michael Gellner <i>M. Gellner</i> Telephone No. (703)308-0956 | |